


lateral valve

type **DRV 20**



3/2 way valve direct acting
pressure range low vacuum
orifice DN 20 mm
connection thread
function valve
 normally closed (A → B)
symbol NC



⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

design pressure balanced, with spring return, intersecting switch-over
body materials ① aluminium

valve seat synthetic resin on metal
seal materials NBR, CR

details needed

- orifice
- port
- function NC
- operating pressure
- inlet pressure at A, B or C
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage

general specifications		options
ports	DRV	threads G 3/4
function	NC	
pressure range	bar	vacuum max. 98%
Kv value	A → B Δp max.2 / B → A Δp max.2 / A → C Δp max.2 / C → A Δp max.2	
vacuum	m³/h 9,1	
pressure-vacuum	P ₁ ↔ P ₂	pressure side max. 1bar, vacuum side leak rate <10 ⁻⁶ mbar·l·s ⁻¹
back pressure	P ₂ > P ₁	
media	gaseous	
abrasive media damping	opening	
	closing	
flow direction	see pressure range	
switching cycles	1/min 70	
switching time	ms opening 160 closing 100	
media temperature	°C DC: -10 to +80 AC: -10 to +80	
ambient temperature	°C DC: -10 to +80 AC: -10 to +80	
limit switches		
manual override		
approvals		
mounting	mounting holes	
weight	kg 5,6	upon request
additional equipment		

electrical specifications

electrical specifications		options
nominal voltage	U _n 24 V DC	special voltage upon request
	U _n 230 V 40-60 Hz AC	special voltage upon request
actuation	DC direct-current magnet	
	AC direct-current magnet with integrated rectifier	
insulation rating protection	H 180°C	
energized duty rating connection	IP65	
	ED 100%	
	plug acc. DIN EN 175301-803 form A, 4 positions x 90° / wire diameter 6-8 mm	
optional additional equipment		
current consumption	illuminated plug with varistor	
N-coil	24 V DC 1,70 A	
	230 V 40-60 Hz AC 0,16 A	
H-coil		
explosion proof		
limit switches		


⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

■ specifications not highlighted are standard
 ■ specifications highlighted in grey are optional

type DRV 20

function: NC
closed when not energized (A ▶ B)

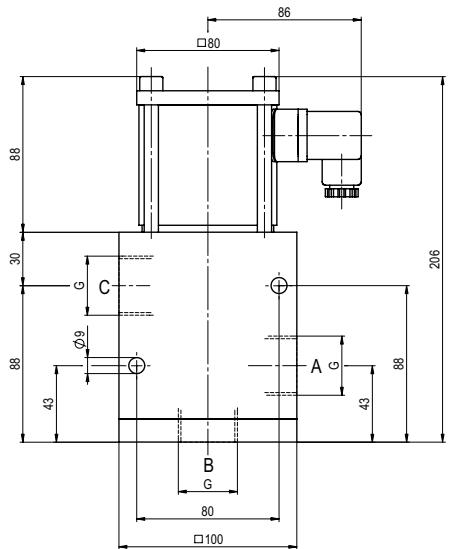

The application-specific layout relating to temperature, pressure conditions, switching behavior, media and its consistency may restrict the range of use or necessitate relevant modifications to materials used and seal arrangements.

Rights reserved to make technical alterations • Not responsible for printing errors • Detailed drawings can be obtained upon request