


positioning valve type RMQ 20



control valve electro motorically controlled
pressure range PN 0-64 bar
orifice DN 20 mm
connection thread
function stepless stroke regulation



⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

design direct acting with integrated 3-point-regulation

body materials

① brass	④
②	⑤
③	⑥ stainless steel

valve seat synthetic resin on metal
seal materials FPM, PTFE

general specifications

options

details needed

- orifice
- port
- operating pressure/ Δp
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage
- control signal

ports	RMQ	threads G 3/4 - G 1
function		stepless regulation
pressure range	bar	0-64
Kv value	DN	20
	m³/h	0-7,3
back pressure	bar	max. 10
media		gaseous - liquid - highly viscous - contaminated
abrasive media		version available
flow direction	A \Rightarrow B	as marked
switching cycles		
operating time	DN	20
closed - open	sec. ca.	3
media temperature	°C	-20 to +80
ambient temperature	°C	max. +70
approvals		WAZ
mounting		mounting bracket
weight	kg	RMQ 5,9

electrical specifications

options


nominal voltage	U _n	24 V DC
	U _n	24 V AC
power consumption	DC	< 0,5 A
	AC	< 0,5 A
control signals	I _E	0-20 mA / 4-20 mA
	U _E	0-10 V
protection	IP 65 (P54)	acc. DIN 40 050
energized duty rating	ED	100%
connection	M12x1	concentric socket DIN 40040, 5 poles / wire diameter 6-8 mm
additional equipment		internal separate actual value output

⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.


⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

- specifications not highlighted are standard
- specifications highlighted in grey are optional

kv-value

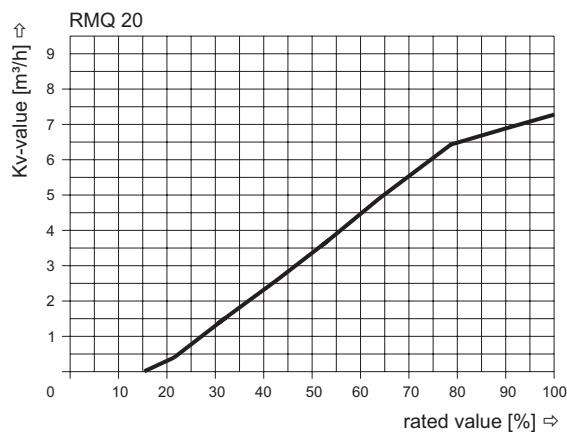


connection plan / connection plug



- 1: nominal voltage
- 2: nominal voltage
- 3: control signal
- 4: ground (control signal)
- 5: \oplus

option separate actual value output



- 1: actual value 4-20 mA (+)
- 2: actual value 4-20 mA (-)

The application-specific layout relating to temperature, pressure conditions, switching behavior, media and its consistency may restrict the range of use or necessitate relevant modifications to materials used and seal arrangements.